

LDK® All Stainless Steel Bearing Units

SSUCFL..A All stainless steel flange units 2-bolt and inch-based housing,Setscrew locking



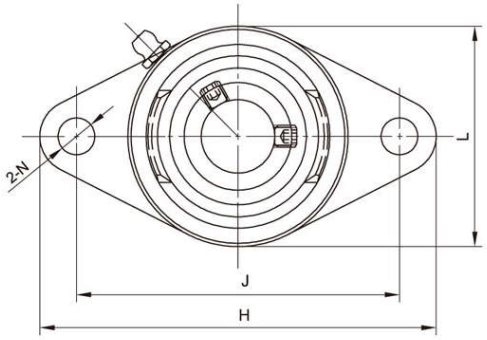

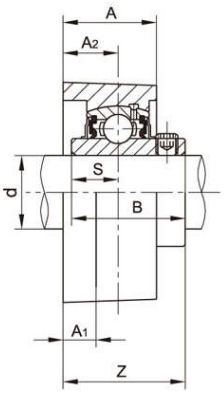

• Solid Based

Unit No.	Shaft Dia d		Dimensions(mm)										Bolt Size (mm)	Weight (kg)
	(in)	(mm)	H	J	A_2	A_1	A	N	L	Z	B	S		
SSUCFL204A		20	113	90	15	11	27	12	60	33.3	31	12.7	M10	0.50
204-12A	3/4													
SSUCFL205A		25	130	99	16	13	28	12.5	68	35.8	34.1	14.3	M14	0.71
205-14A	7/8													
205-15A	15/16													
205-16A	1													
SSUCFL206A		30	148	117	18	13	31	12.5	79	40.2	38.1	15.9	M14	1.04
206-17A	1-1/16													
206-18A	1-1/8													
206-19A	1-3/16													
206-20A	1-1/4													
SSUCFL207A		35	161	130	19	14	34	14	90	44.4	42.9	17.5	M14	1.38
207-20A	1-1/4													
207-21A	1-5/16													
207-22A	1-3/8													
207-23A	1-7/16													
SSUCFL208A		40	175	144	21	15	36	14	100	51.2	49.2	19	M14	1.73
208-24A	1-1/2													
208-25A	1-9/16													
SSUCFL209A		45	187	148	22	16	38	16	108	52.2	49.2	19	M16	2.07
209-26A	1-5/8													
209-27A	1-11/16													
209-28A	1-3/4													
SSUCFL210A		50	195	157	22	16	40	16	115	54.6	51.6	19	M16	2.47
210-30A	1-7/8													
210-31A	1-15/16													
210-32A	2													

Notes:1.Upon request,available with plastic close cap(CC) or open cap(OC) at one end. Ordering example SSUCFL204-12A CC.
2.Back seal is available when mounted with narrow inner ring SSB/SSA inserts.
3.Hand polishing surface housing available upon request. Ordering example SSUCFL204-12A HP
4.Lubricated with food grade grease.