

LDK® Corrosion Resistant Bearing Inserts

SSB Standard duty, Stainless steel,Narrow inner ring,Setscrew locking, Factory-Lubed with food grade grease and with silicon rubber seal.



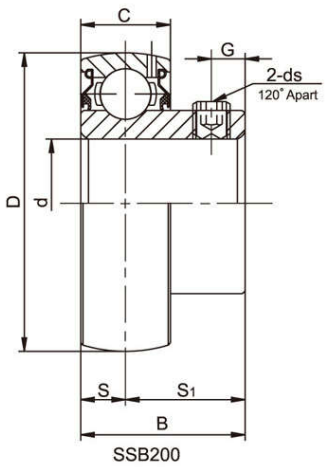

SSB200

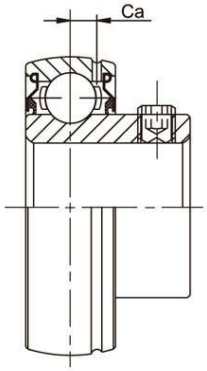

SSB200G


H TYPE SEAL


J TYPE SEAL

Bearing No.	Shaft Dia d		Dimensions(mm)								Load rating (KN)		Weight (kg)
	(in)	(mm)	D	B	C	S	S1	G	ds (mm)	ds (in.UNF)	Ca	Dynamic Cr	Static Cor	
SSB204		20	47	25	14	7	18	5	M6x1		4	12.82	6.65	0.12
204-12	3/4									1/4-28				
SSB205		25	52	27	15	7.5	19.5	5.5	M6x1		4	14.03	8.05	0.18
205-13	13/16									1/4-28				
205-14	7/8													
205-15	15/16													
205-16	1													
SSB206		30	62	30	16	8	22	5.9	M6x1		4.9	19.47	11.43	0.26
206-17	1-1/16									1/4-28				
206-18	1-1/8													
206-19	1-3/16													
206-20	1-1/4													
SSB207		35	72	32	17	8.5	23.5	8	M8x1		5.4	25.69	15.55	0.43
207-20	1-1/4									5/16-24				
207-21	1-5/16													
207-22	1-3/8													
207-23	1-7/16													
SSB208		40	80	34	18	9	25	8	M8x1		5.8	29.51	18.14	0.60
208-24	1-1/2									5/16-24				
208-25	1-9/16													
SSB209		45	85	36	19	9.5	26.5	8	M8x1		6.1	31.85	20.80	0.8
209-26	1-5/8									5/16-24				
209-27	1-11/16													
209-28	1-3/4													
SSB210		50	90	38	20	10	28	10	M10x1.25		6.5	34.99	23.70	0.83
210-30	1-7/8									3/8-24				
210-31	1-15/16													
210-32	2													
SSB211		55	100	40	21	10.5	29.5	10	M10x1.25		7	43.34	29.39	1.12
211-32	2									3/8-24				
212-33	2-1/16													
211-34	2-1/8													
211-35	2-3/16													
SSB212		60	110	42	22	11	31	10	M10x1.25		7.3	47.68	33.43	1.55
212-36	2-1/4									3/8-24				
212-37	2-5/16													
212-38	2-3/8													
212-39	2-7/16													